


W4I-GDUP-XX INTERNAL TRI-BAND ANTENNA

Key Features

- Supports GSM, DCS, PCS Tri-band frequencies
- Optional frequency expansion to CDMA, 3G bands
- Custom designs available on requirements
- Easy installation

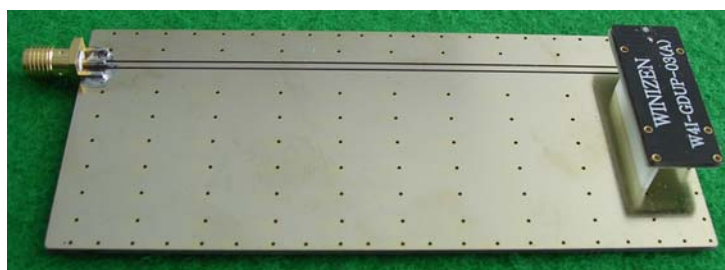


Specifications

Electrical Specifications			Mechanical Specifications		
Frequency Range	MHz	880 ~ 960 1675 ~ 2225	Height	mm	7
VSWR	-	Less than 3:1 Less than 3:1	Length	mm	12
Max. Gain	dBi	1 ± 1 (dBi) 2 ± 1 (dBi)	Width	mm	30
Polarization	-	Linear	Weight	g	3
Radiation Pattern	-	Omni-directional	Operating Temp.	℃	-30 ~ +90
Impedance	Ohms	50	Type	-	U-Shaped Slot With Multiple Layers

W4I-GDUP-XX INTERNAL TRI-BAND ANTENNA

Typical Characteristics

Return Loss:

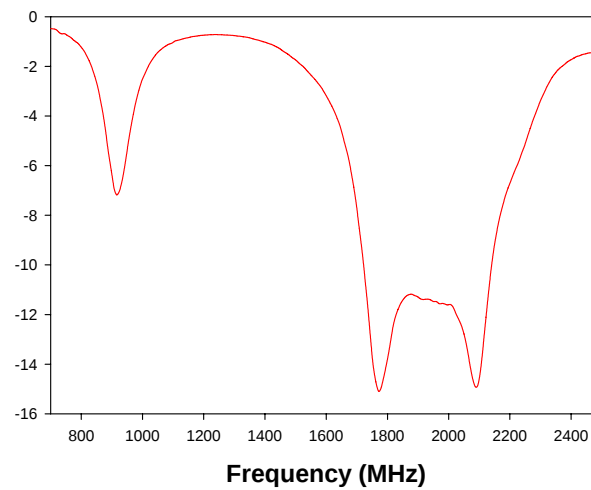

V.S.W.R:

